

# Solex - Xenon Beacon

Xenon Beacons are a cost effective compliment to audible alarms, for use in areas of high ambient noise. The wide operating voltage and automatic synchronisation of the Solex makes it a universal solution for all types of alarm and monitoring systems.





## Technical Specification

Voltage	9 - 60Vdc
Current	Solex 3 85 - 25mA Solex 10 185 - 45mA Solex 15 510 - 120mA (current drops at higher voltage)
Light output	Solex 3 2.5cd Solex 10 10cd Solex 15 15cd
Monitoring	Reverse polarity
Temperature	- 25°C to + 70°C
Protection	IP54 (s)* IP65 (d)*
Construction Base	ABS, PC lens
Weight	0.15Kg (s)* 0.18Kg(d)*
Colour	Red or white base
Lens colour	Red, amber, blue, green or clear

(s)\* Shallow Base

(d)\* Deep / U Base

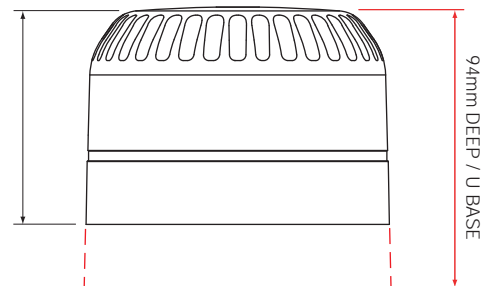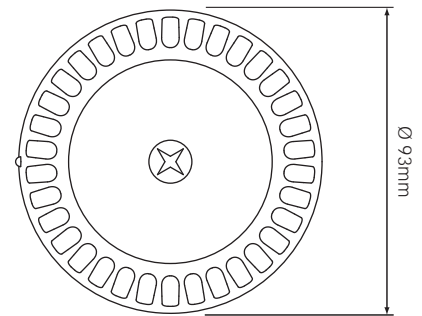

### Features

- 3 light output options
- 5 lens colour options
- 9-60V
- Tamper switch option

### Benefits

- Manage the current to suit your application
- Use for fire warning or general signalling
- Wide operating voltage for maximum flexibility
- For use where security is an issue

### Reference

SO/R/SR/3

SO/R/DR/3

SO/R/SR/10

SO/R/DR/10

SO/R/SR/15

SO/R/SR/15

### Catalogue No.

531025FULL-0061

531025FULL-0087

531024FULL-0060

531024FULL-0088

531028FULL-0064

531028FULL-0111

### Description

Solex Beacon, Red Lens, Red Body, Shallow Base, 3cd

Solex Beacon, Red Lens, Red Body, Deep Base, 3cd

Solex Beacon, Red Lens, Red Body, Shallow Base, 10cd

Solex Beacon, Red Lens, Red Body, Deep Base, 10cd

Solex Beacon, Red Lens, Red Body, Shallow Base, 15cd

Solex Beacon, Red Lens, Red Body, Deep Base, 15cd

For full list of part numbers, turn to page 60